



00200CB2GPR01L

Connector

4GHz SMB(J)180°,G,Receptacle PCB Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-4GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	SMB Jack

Environmental

Operating Temperature	-65°C~155°C
Vibration	MIL-STD-202 Meth.204
Corrosion	MIL-STD-202 Meth.101(5% salt solution)




Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	

Outling Drawing (Unit:mm) Tolerance:X=±0.2 ,X.X=±0.1 , X.XX=±0.05

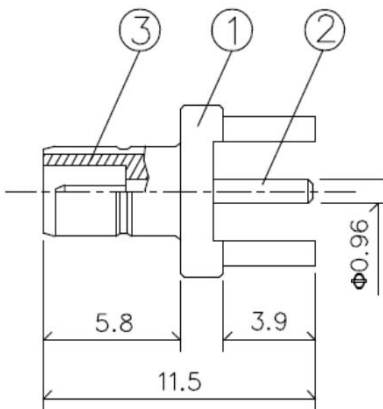

All Specification Changed Without Notification.