



00600A1A2DA027

Adapter


6GHz 50Ω SMA(M)–SMA(F) R/A
Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

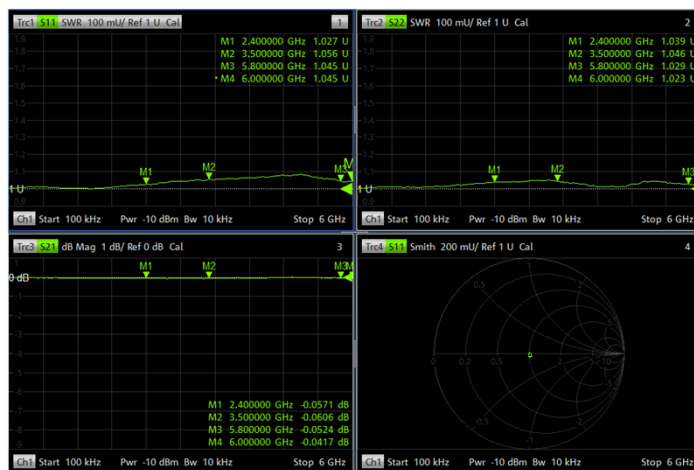

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.2:1(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40℃~85℃
-----------------------	----------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Inner Retaining Ring	Stainless Steel	
Gasket	Silicone	Red

Outling Drawing (Unit:mm) Tolerance:±0.1mm

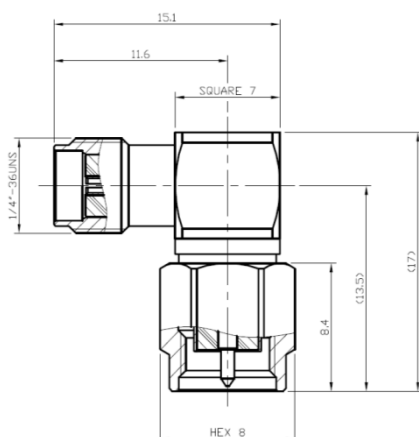

All Specification Changed Without Notification.