




00600A1A2G601L

Adapter

18GHz 50Ω SMA(M)/Stainless- SMA(F)/Gold Adapter/Air Insulator

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-18GHz
VSWR	1.2:1(Max.)
Insertion Loss	0.2dB(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------


Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
C-Ring	Beryllium Copper	
Gasket	Silicon	
Shell	Stainless Steel	Passivated

Test Report

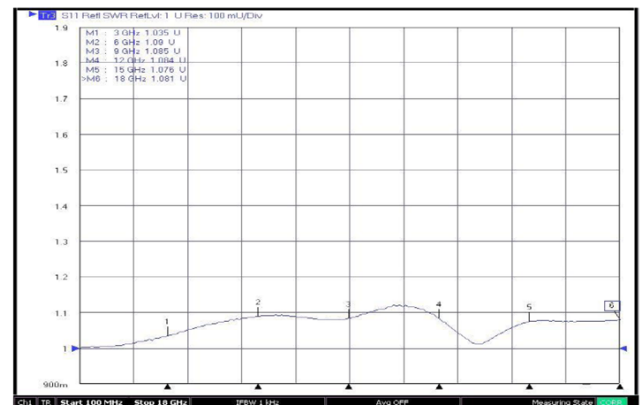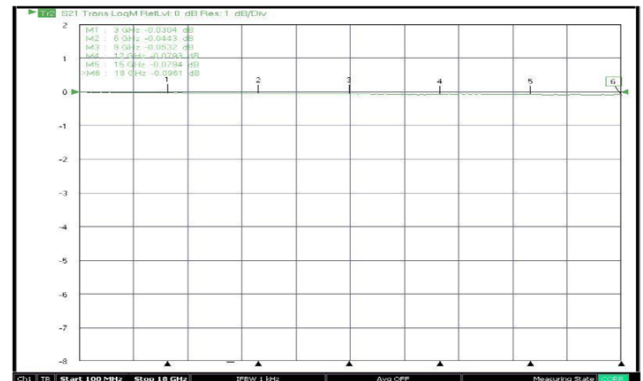

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

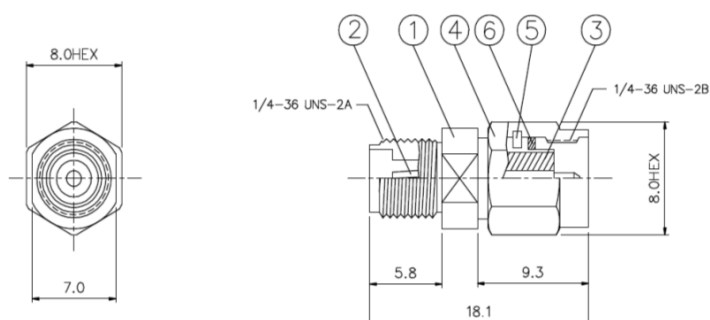

All Specification Changed Without Notification.