




00600A1N1NA03L

Adapter

18GHz 50Ω 六角N(M)-SMA(M)
Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR

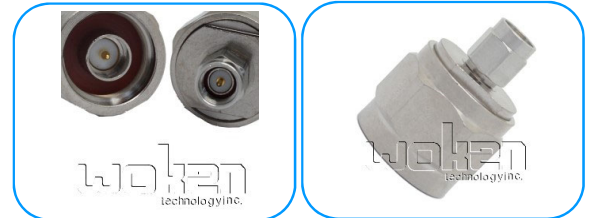

Electrical Specifications

Frequency	DC-18GHz
VSWR	1.2:1(Max.)@DC-12GHz 1.3:1(Max.)@12-18GHz
Insertion Loss	0.2dB(Max.)@DC-12GHz 0.35dB(Max.)@12-18GHz
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	N Male

Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------


Material

Part	Material	Plated
Body	Brass	Electroless Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
SMA C-Ring	Beryllium Copper	
N C-Ring	SUS304	
Gasket	Silicone	
SMA Shell	SUS303	Passivated
N Shell	Brass	Electroless Nickel

Test Report

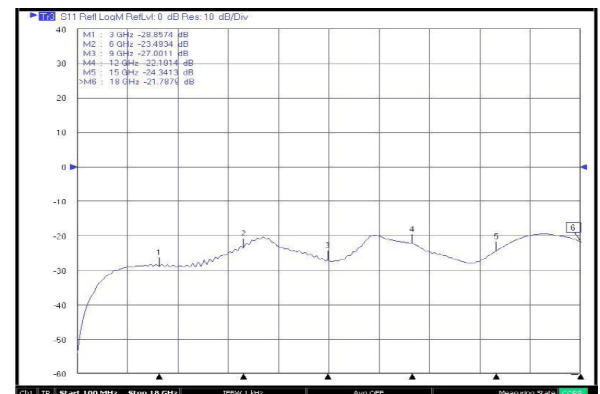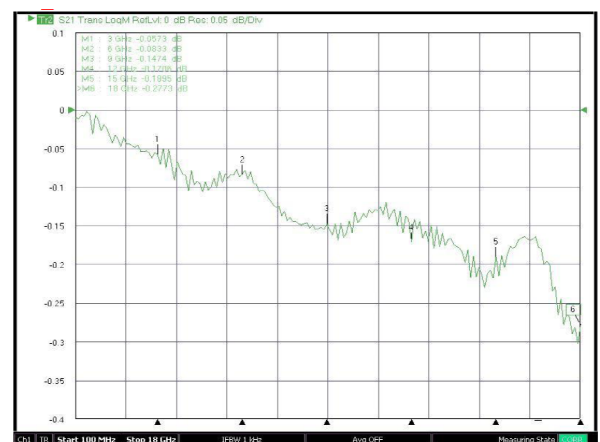

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

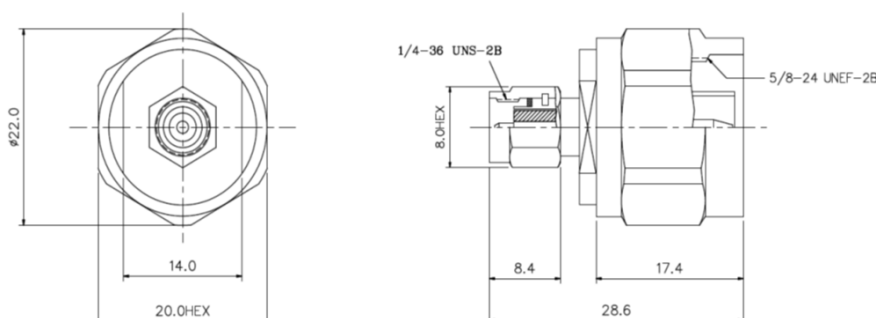

All Specification Changed Without Notification.