



00600A1N2NA037

Adapter


10GHz 50Ω N(F)–SMA(M)
Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

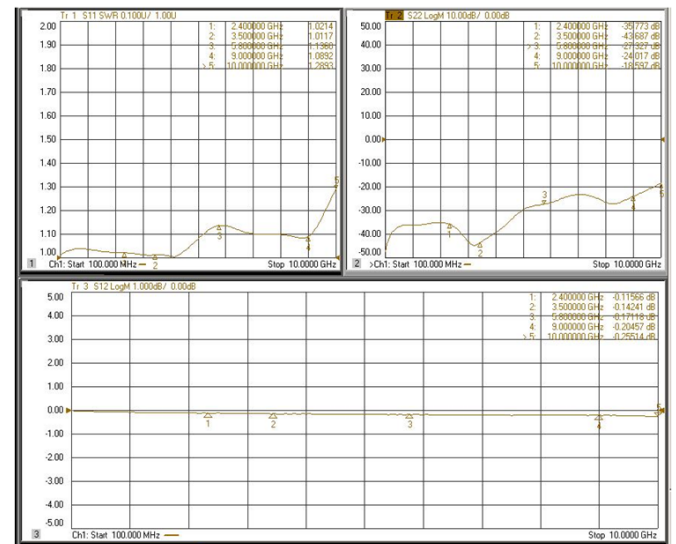

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Connection 1	N Female
Connection 2	SMA Male

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Gasket	Silicone	Red
Inner Retaining Ring	Stainless	
Shell	Brass	Nickel

Outling Drawing (Unit:mm) Tolerance:±0.1mm

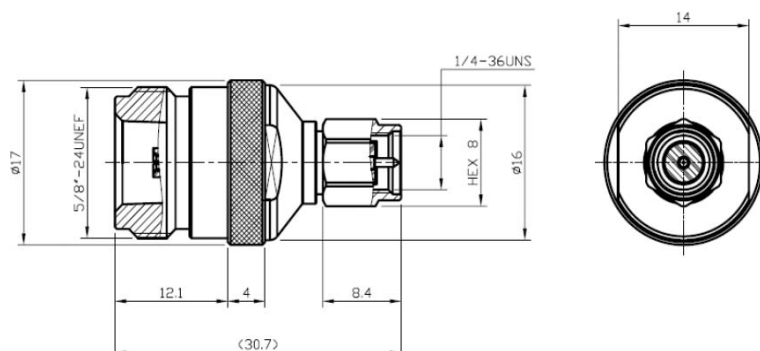

All Specification Changed Without Notification.