







00600A1T5NA017

Adapter

6GHz 50Ω SMA(M)-Reverse TNC(F) Adapter/Nickel

lectnologylne.







High Repeatability



Low VSWR

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.35:1(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	Reverse TNC Female


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~85°C

Test Report

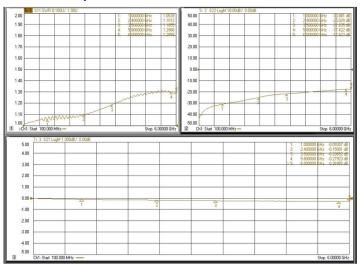

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Press Washer	Brass	Nickel
Inner Retaining Ring	Stainless Steel	
Gasket	Silicone	Red

Outling Drawing (Unit:mm) Tolerance:±0.4mm

