



00600A2A2DA01L

Adapter

10GHz 50Ω SMA(F)–SMA(F) R/A Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

| | |
|--------------|-------------|
| Frequency | DC-10GHz |
| VSWR | 1.3:1(Max.) |
| Impedance | 50Ohm |
| Connection 1 | SMA Female |
| Connection 2 | SMA Female |

Mechanical

| | |
|------------|------------|
| Durability | 500 Cycles |
|------------|------------|


Environmental

| | |
|-----------------------|-------------|
| Operating Temperature | -65°C~155°C |
|-----------------------|-------------|



Material

| Part | Material | Plated |
|------------|------------------|--------|
| Body | Brass | Gold |
| Center Pin | Beryllium Copper | Gold |
| Insulator | Teflon | |

Outling Drawing (Unit:mm) Tolerance:X=±0.2mm ,X.X=±0.1mm,X.XX=±0.05mm

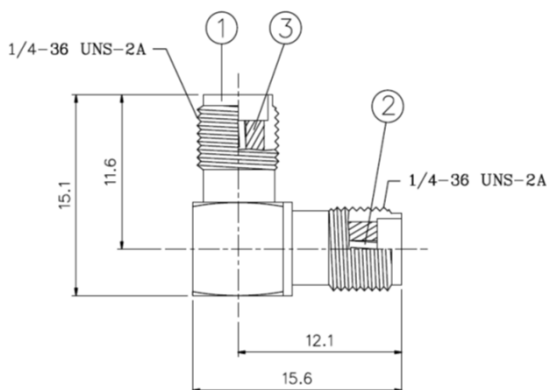

Test Report

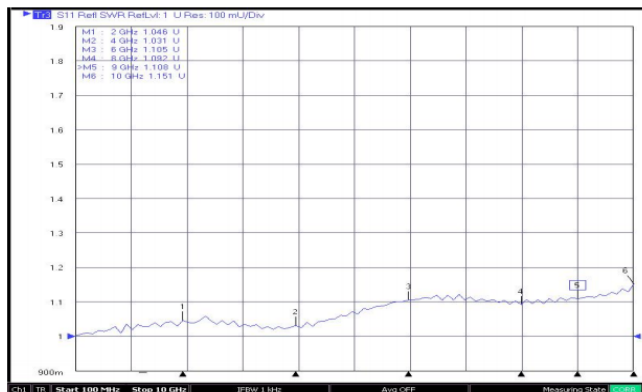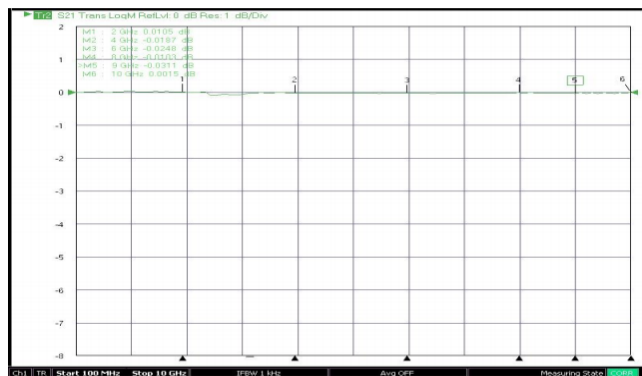

All Specification Changed Without Notification.