



00600A2N9NA017

Adapter

6GHz 50Ω N(F) Bulkhead-SMA(F) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Connection 1	N Female Bulkhead
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
O-Ring	Silicone	Red
Nut	Brass	Nickel
Washer	Brass	Nickel

Outling Drawing (Unit:mm) Tolerance:±0.4mm

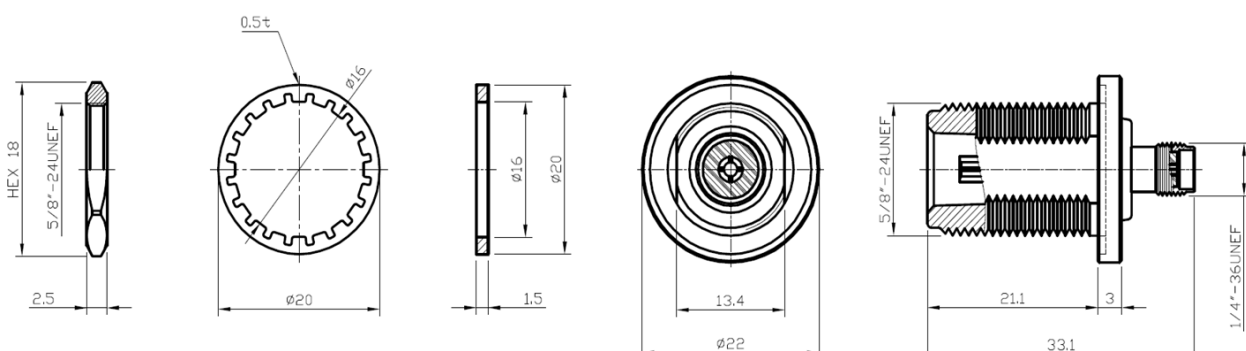

All Specification Changed Without Notification.