



00600A2Q1G6017

Adapter

6GHz 50Ω Talon Quick SMA(M)– SMA(F) Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.2:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Connection 1	Talon Quick SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Gasket	Silicone	

Outling Drawing (Unit:mm) Tolerance:±0.1mm

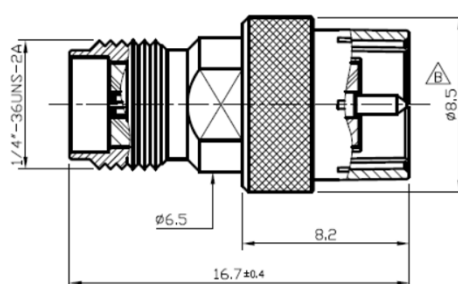

Test Report

