



# 00600A5T3NA997

## Adapter


### 6GHz 50Ω Reverse SMA(F)–Reverse TNC(M) Adapter

#### Features

- ✓ High Repeatability
- ✓ Low VSWR



#### Test Report

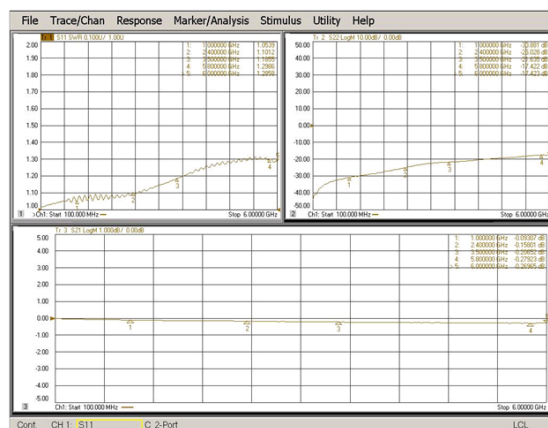

#### Electrical Specifications

Frequency	DC-6GHz
VSWR	1.2:1(Max.)@DC-3GHz 1.5:1(Max.)@3-6GHz
Impedance	50Ohm
Connection 1	Reverse SMA Female
Connection 2	Reverse TNC Male

#### Mechanical

Durability	500 Cycles
------------	------------

#### Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

#### Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Inner Retaining Ring	Brass	Nickel
Washer	Brass	Nickel
Gasket	Rubber	
Shell	Brass	Nickel

#### Outling Drawing (Unit:mm) Tolerance:±0.4mm

