



0060WA2F0A599A

Waveguide Adapter

8.2-12.4GHz 50Ω SMA(F)-WR90(UBR100) Waveguide Adapter



Features

- ✓ Low Insertion Loss
- ✓ Low VSWR



Test Report

This data is the value of the two

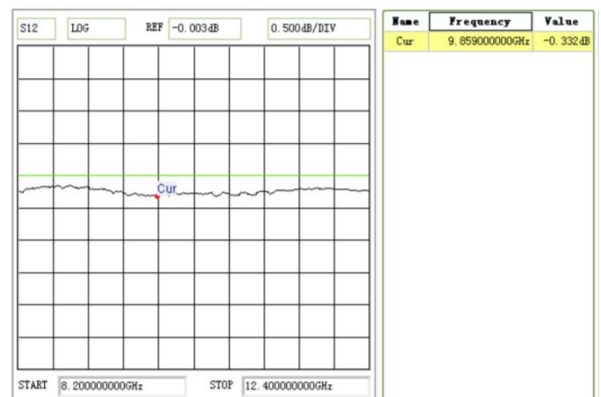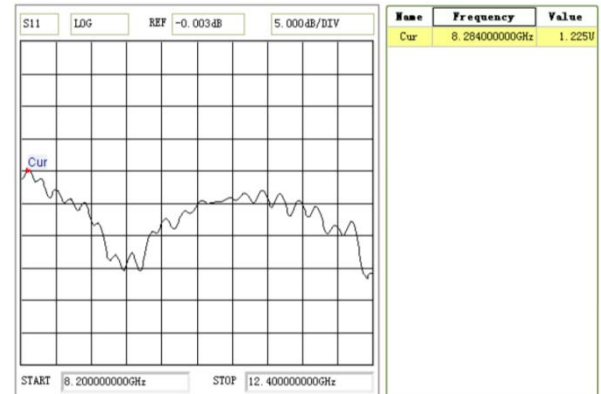

Electrical Specifications

Frequency	8.2-12.4GHz
VSWR	1.25:1(Max.)
Insertion Loss	0.2dB(Max.)
Waveguide Size	WR90
Waveguide Flange	UBR100
Coaxial Connection	SMA Female

Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	- 20°C~70°C
-----------------------	-------------

Material

Material	Inner Finishing	Coating
Brass	Silver Plating	Black Paint

Outling Drawing (Unit:mm)

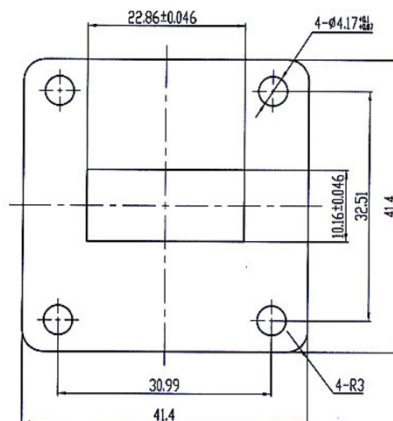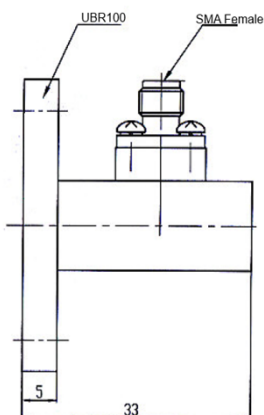

All Specification Changed Without Notification.