



# 0061A7620-XXXX

## Testing Probe


### 6GHz 50Ω SMA(F) 2pin 2Hole Probe Adapter (Pitch: 2.54mm)

#### Features

- ✓ High Repeatability
- ✓ Low VSWR



#### Test Report

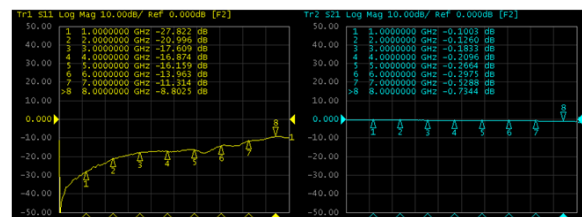

#### Electrical Specifications

Frequency	DC-6GHz
Return Loss	13dB(Min.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Probe Tip

#### Material

Part	Material	Plated
Signal Conductor	Brass	Gold
Shielding Plunger	Beryllium Copper	Gold
Insulator	Teflon	
Shielding Tube	Brass	Gold
SMA 2Hole Body	Brass	Gold


#### Mechanical

Durability	8K Cycles ※内針可被更換次數:10次
Spring Force	Signal Conductor :150g ± 20% at 1.8mm Shielding Plunger:150g ± 20% at 1.8mm

#### Outling Drawing (Unit:mm)

Total Length:±0.3mm

DIMENSIONS	TOLERANCES
.X	±0.20
.XX	±0.10
.XXX	±0.05
.X'	±1°

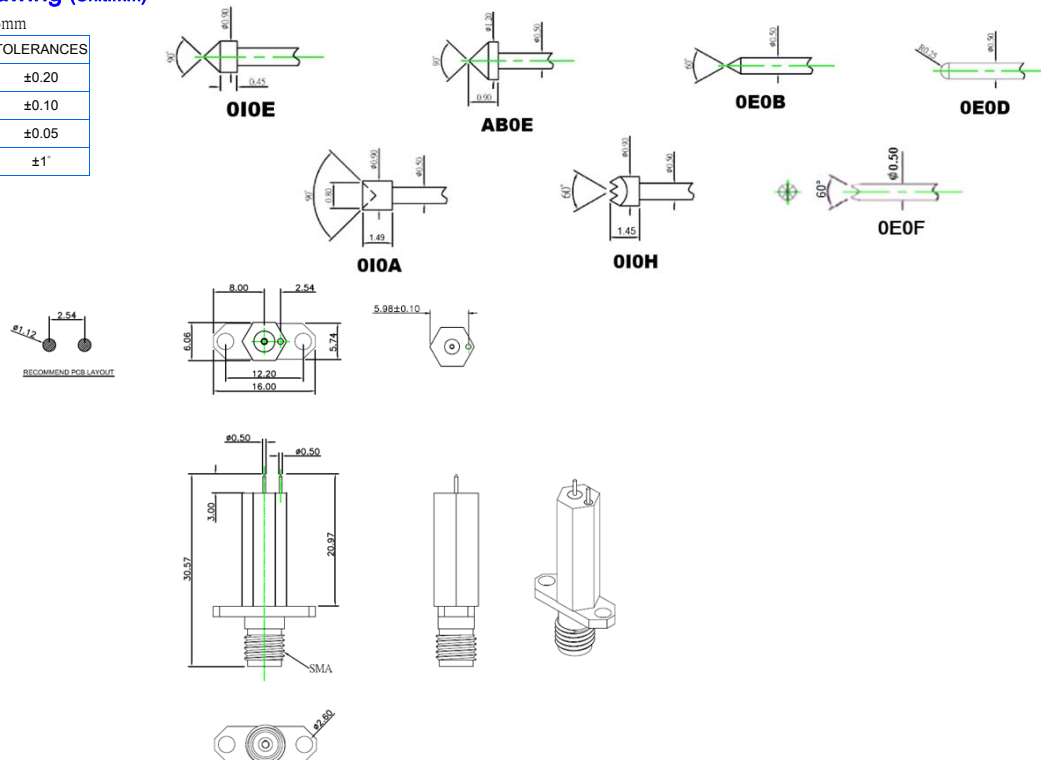

All Specification Changed Without Notification.