



# 00700A1AG2001Y

## Termination


### 6GHz 50Ω SMA(M) 20W Termination

#### Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR



#### Test Report

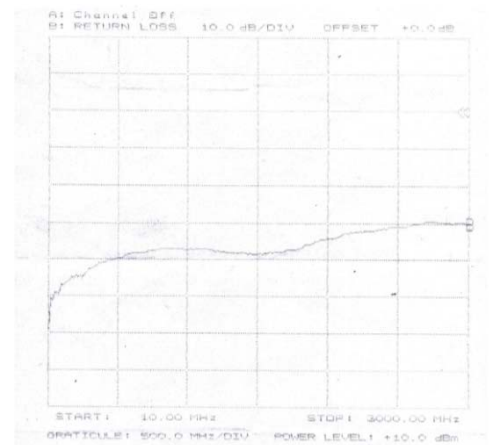

#### Electrical Specifications

Frequency	DC-6GHz
VSWR	1.2:1(Max.)
Input Power	20W(Avg.)@25°C (Derated Linearly to 2W @125°C)
Peak Power	2KW(Max.) (5μsec Pluse,0.2% Duty Cycles)
Impedance	50Ohm
Connection	SMA Male



#### Mechanical

Durability	500 Cycles
------------	------------

#### Material

Part	Material	Plated
Outer Conductor	Brass	Nickel
Center Pin	Brass	Gold

#### Outling Drawing (Unit:mm) Tolerance:±5%

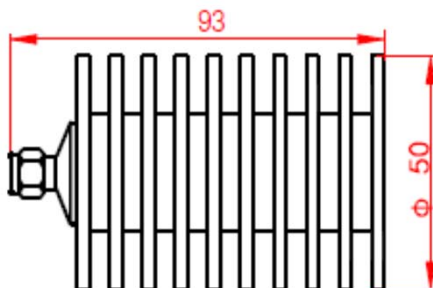

All Specification Changed Without Notification.