



# 00700A1AG2501F

## Termination

### 6GHz 50Ω SMA(M) 25W Termination

#### Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR



#### Test Report

#### Electrical Specifications


Frequency	DC-6GHz
VSWR	1.25:1(Max.)
Rated Power	25W@25°C
Impedance	50Ω
Connection	SMA Male

#### Mechanical

Durability	500 Cycles
------------	------------

#### Environmental


Operating Temperature	-55°C~125°C
-----------------------	-------------

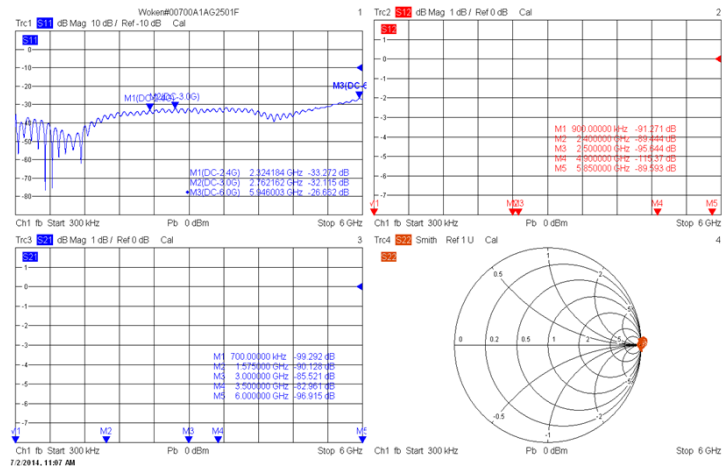

#### Material

Part	Material	Plated
Connector	Brass	Tri-Metal
Center Pin	Brass	Gold

#### Outling Drawing (Unit:mm)

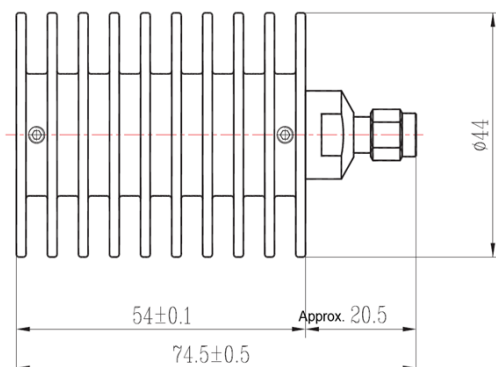

All Specification Changed Without Notification.