



00802N1D10H-XX

Attenuator

3GHz N (F-F) 200W Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-3GHz
Standard Values	6,10,20,30dB
Attenuation Accuracy	3,6,10,20 dB: ± 0.7 dB 30dB : ± 0.8 dB
VSWR	1.2:1(Max.)
Average Power	Fwd.200W@25°C
Impedance	50Ohm
Connection 1	N Female
Connection 2	N Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Brass	Nickel

Outling Drawing (Unit:mm)

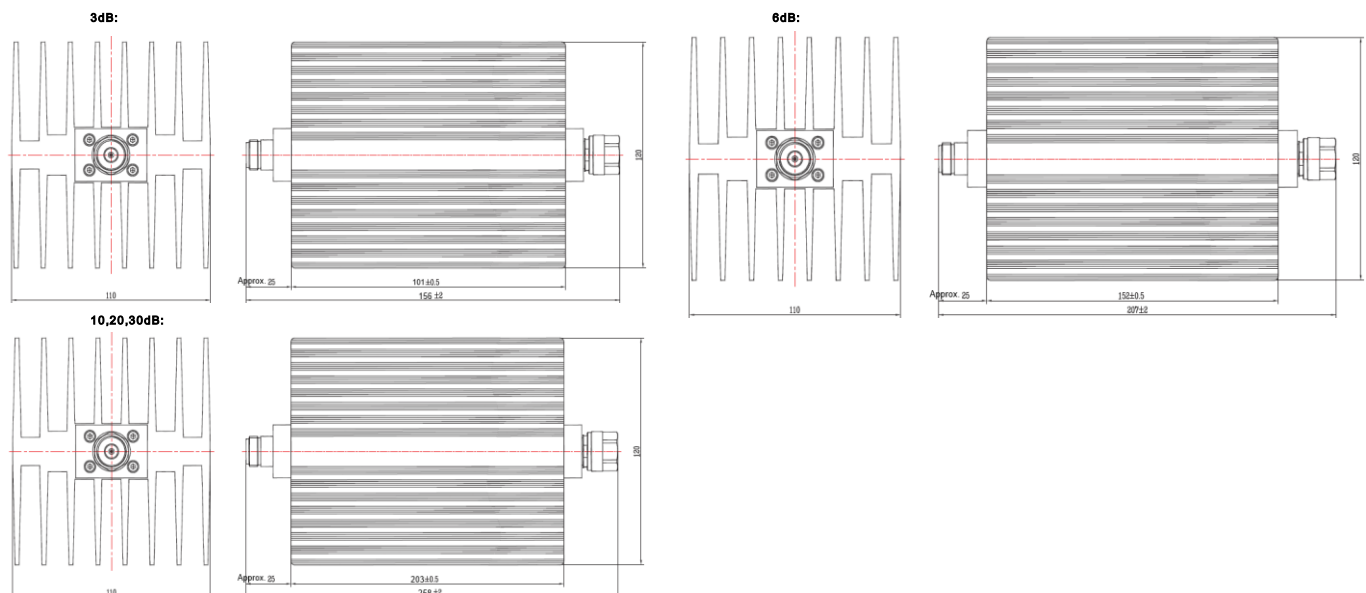

Test Report

