




0120A06208001K

Power Divider

**2-8GHz 6Way SMA Fwd.30W/ Rev.2W
Isolated Power Divider**

Features

- ✓ Use as Divider or Combiner
- ✓ Low Insertion Loss & VSWR
- ✓ High Isolation



Test Report

Electrical Specifications

Frequency	2-8GHz
Insertion Loss (Above Theoretical Loss:7.8dB)	1.5dB(Max.)
VSWR(Input)	1.4:1(Max.)
VSWR(Output)	1.3:1(Max.)
Isolation	18dB(Min.)
Phase Unbalance	±4°(Max.)
Amplitude Unbalance	±0.6dB(Max.)
Power:Forward:	30W (Avg.)
Reverse:	2W(Avg.)
Impedance	50Ohm
Connection	SMA Female


Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~75°C
-----------------------	------------


Outling Drawing (Unit:mm) Tolerance:±0.3

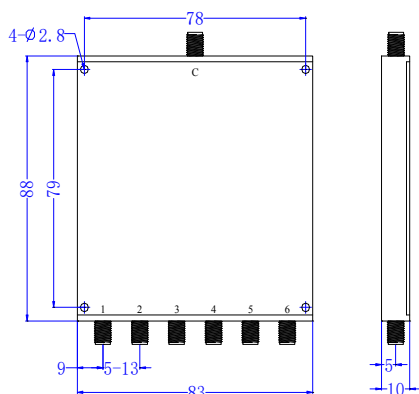

Insertion Loss/VSWR/Amplitude/Phase

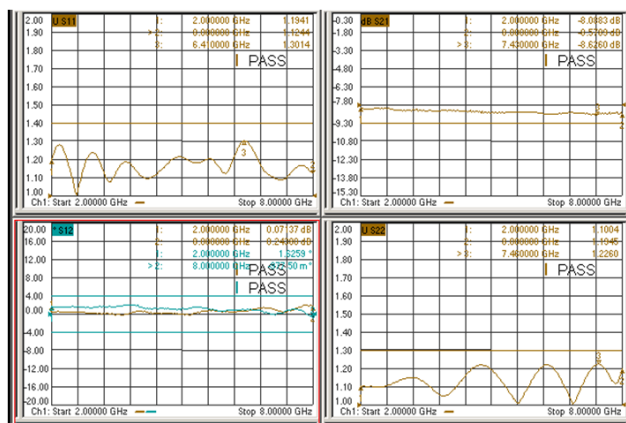

Isolation

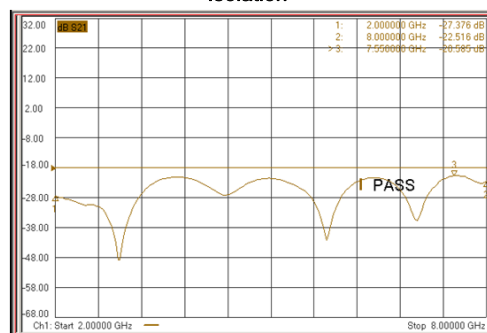

All Specification Changed Without Notification.