



0169A00180002W

RF Switch Box

18GHz SMA SP4T Multiple Port RF Switch Box

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	18GHz
VSWR	1.3:1(Max.)@DC-8GHz 1.4:1(Max.)@8-12GHz 1.5:1(Max.)@12-18GHz
Insertion Loss	0.3dB(Max.)@DC-8GHz 0.4dB(Max.)@8-12GHz 0.5dB(Max.)@12-18GHz
Isolation(Ports)	80dB(Min.)@DC-8GHz 70dB(Min.)@8-18GHz
DC Power	12V/2A(24W)
RF Power	50W
Impedance	50Ohm
Operating Life	1,000,000 Cycles (Min.)
Switching Time	15ms
Coaxial Connection	SMA Female(1 input/4 out)
Control Interface:	RS232, USB Type B , LAN
Operating Voltage	DC12V/290mA


Environmental

Operating Temperature	-25~65℃
-----------------------	---------

支援程式化語言

c++, c#, Java, Delphi, VB, PHP, Python等, 有支援Socket連線及傳送指令功能的程式都可以適用。

Outling Drawing (Unit:mm)

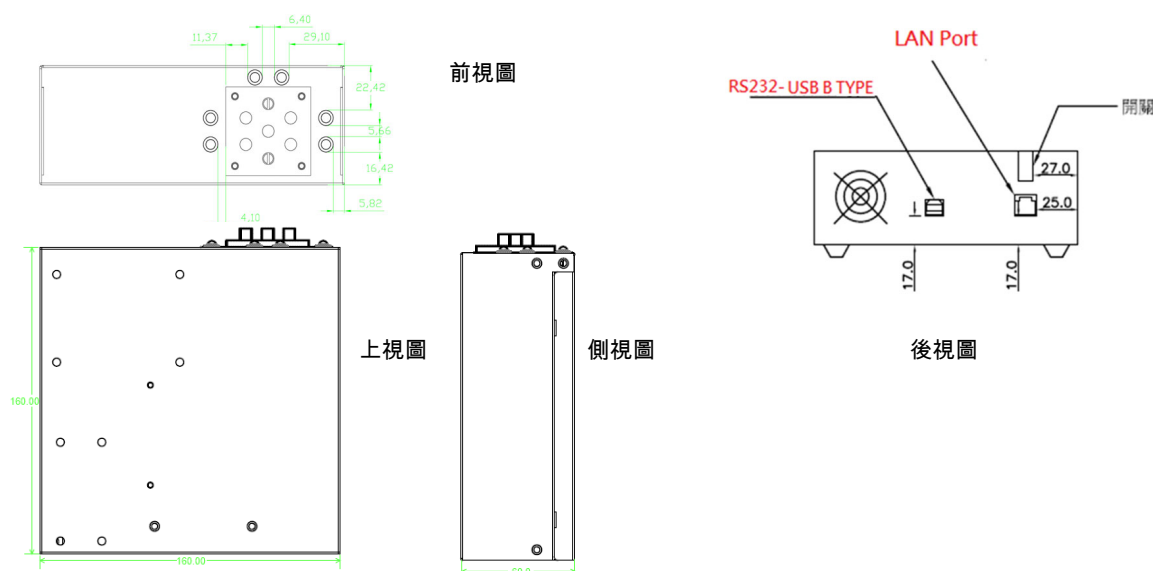

All Specification Changed Without Notification.