

0169A00180003W

RF Switch Box

18GHz SMA SP4T Multiple Port RF Switch Box manual + programing

Features

- High Repeatability
- Low VSWR



Electrical Specifications


Frequency	18GHz
VSWR	1.3:1(Max.)@DC-8GHz
	1.4:1(Max.)@8-12GHz
	1.5:1(Max.)@12-18GHz
Insertion Loss	0.3dB(Max.)@DC-8GHz
	0.4dB(Max.)@8-12GHz
	0.5dB(Max.)@12-18GHz
Isolation(Ports)	80dB(Min.)@DC-8GHz
	70dB(Min.)@8-18GHz
RF Input Power	12V/2A
Impedance	50Ohm
Operating Life	1,000,000 Cycles (Min.)
Switching Time	15ms
Coaxial Connection	SMA Female(1 input/4 out)
Control Interface:	RS232, USB Type B , LAN
Operating Voltage	DC12V/290mA

Environmental


Operating Temperature	-25~65°C
-----------------------	----------

支援程式化語言 c++, #, Java, Delphi, VB, PHP, Python等 , 有支援Socket連線及傳送指令功能的程式都可以適用。

Outling Drawing (Unit:mm)

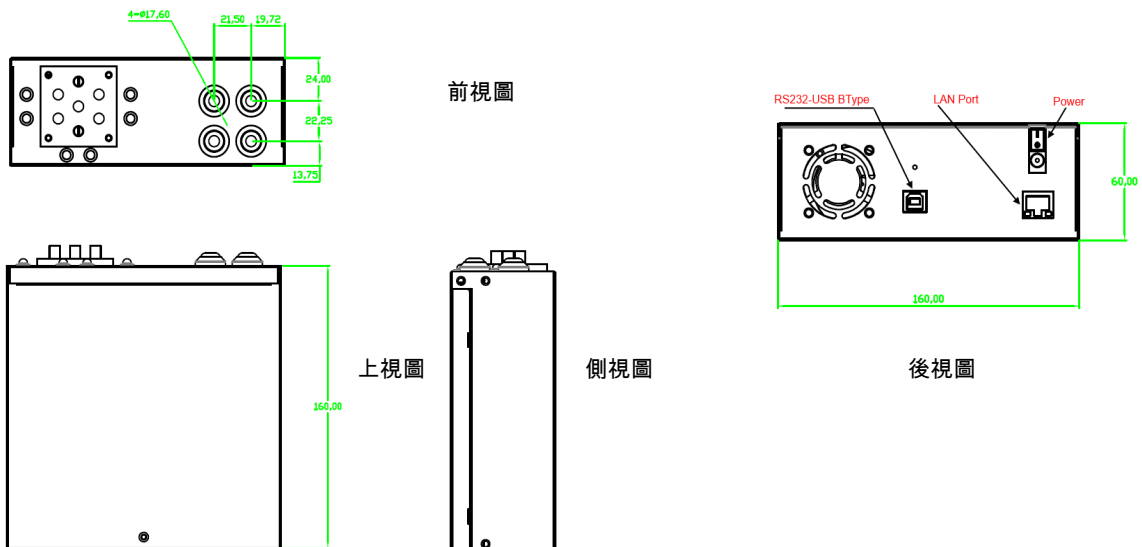

Test Report

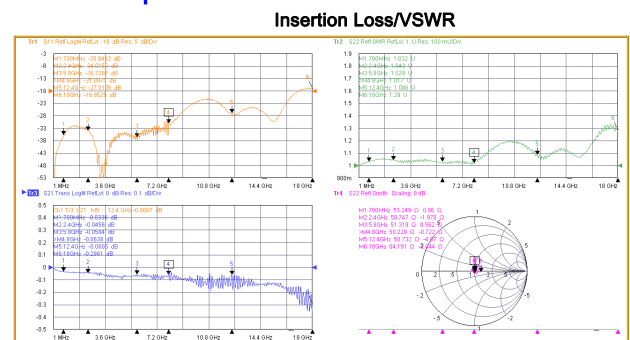

Isolation

