

4

3

2

1

Features:

High Repeatability
Low VSWR



Unit:mm

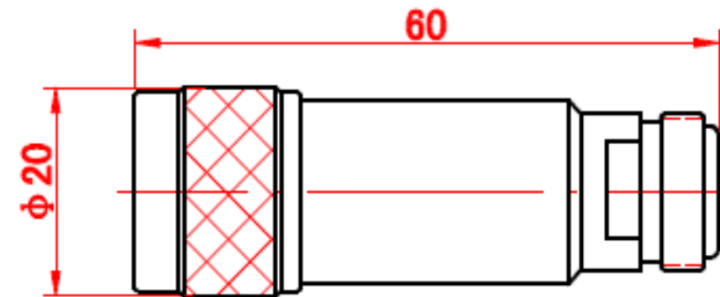
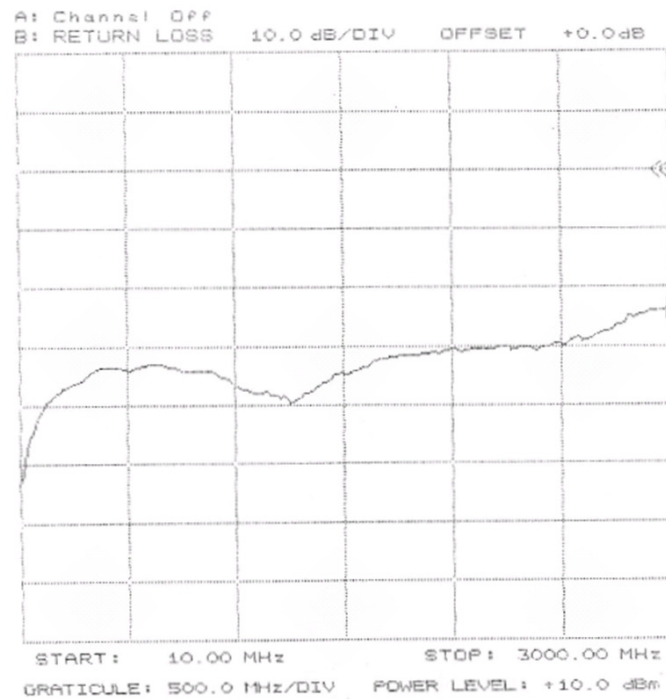
Specifications:**Electrical:**

Frequency:DC-3GHz

VSWR:1.2:1(Max.)

Insertion Loss:6.0dB (Typ.)

Connection: 50ΩN Female to 75ΩN Male

**Material:**

Part	Material	Plated
Body	Brass	Ni
Center Pin	Brass	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

Terence

06/10/12'

ENGR

Jack

06/10/12'

APVD

James

06/10/12'



Woken Technology Inc.

CODE

DWG TITLE

3GHz 50ΩN(F)-75ΩN(M)

SIZE

Impedance Matching Pad

A4

DWG NO.

0300N2N130001L

REV

B

4

3

2

1