

4

3

2

1

Features:

High Repeatability

Low VSWR

**Specifications:****Electrical:**

Frequency:DC-3GHz

VSWR:1.2:1(Max.)

insertion Loss:0.2dB(Max.)

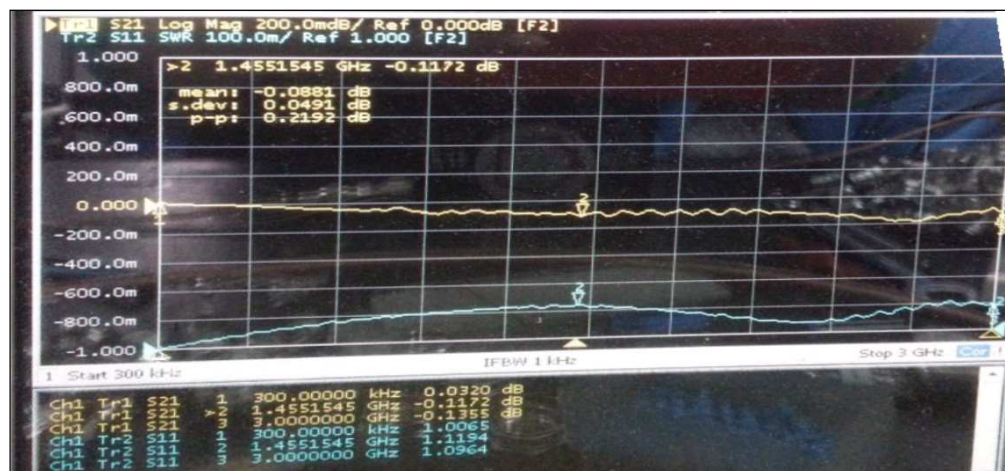
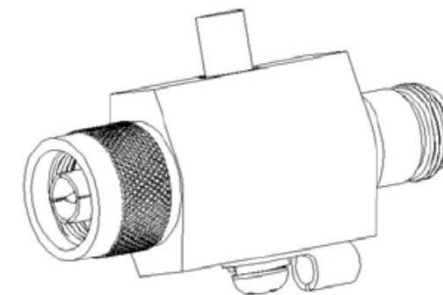
Spark-Over:230V±15%

Power:200W PEP

Connection: N Male to N Female

Mechanical:

Durability:500 Cycles

UNLESS OTHERWISE SPECIFIED ALL DIMENCIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

Terence

10/02/12'

ENGR

Jack

10/02/12'

APVD

James

10/02/12'



Woken Technology Inc.

CODE

DWG TITLE

3GHz N(M)-N(F) 200W Surge Arrestor

SIZE

A4

REV

A

DWG NO.

03100N1N2A001C

4

3

2

1