

Features:

High Repeatability

Low VSWR



Specifications:

Electrical:

Frequency:DC-6GHz

VSWR:1.4:1(Max.)

insertion Loss:0.3dB(Max.)

Spark-Over:230V±20%

Power:200W PEP


Connection: N Male to N Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: 30°C~85°C

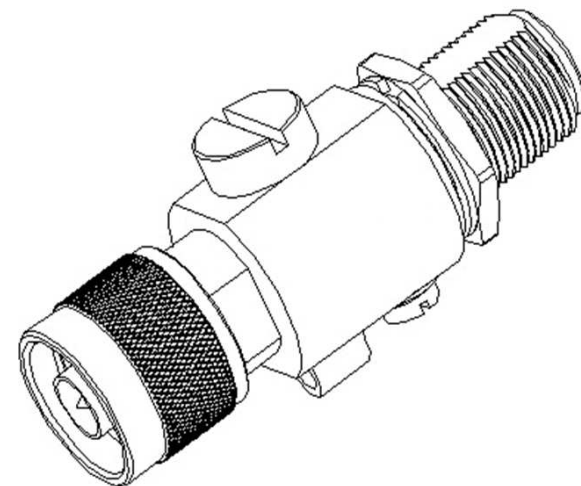

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

10/02/12'

ENGR Jack

10/02/12'

APVD James

10/02/12'



Woken Technology Inc.

CODE

DWG TITLE

6GHz N(M)-N(F) 200W Surge Arrestor

SIZE

A4

REV

A

DWG NO.

03100N1N2A002C