




126036-F38391-G

Testing Probe

10GHz 50Ω 126036/Gold- SMA(F)/Stainless 2Hole Flange Probe Adapter

Features

- High Repeatability
- Low VSWR



Test Report

下圖3/4

Electrical Specifications


Frequency	DC-10GHz
VSWR	1.2:1(Max.)@DC-3GHz 1.3:1(Max.)@3-10GHz
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	126036

Mechanical

Durability	100K Cycles (Min.)
Spring Force	Signal Conductor: 254gf±12gf Ground: 329gf±12gf

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

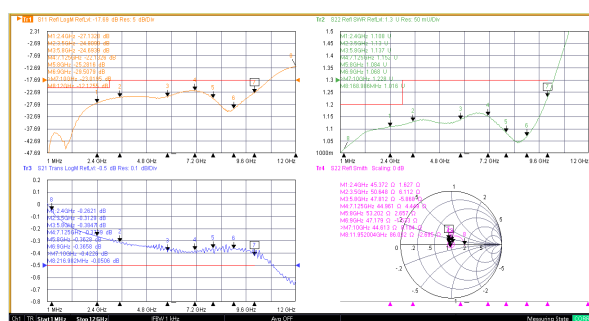


Note.

- 測試數據為實驗室測試值
- 產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為


Material

Part	Material	Plated
126036 Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Spring	SWP	Nickel
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold
SMA Body	Stainless Steel	

Murata 8130-2800 Size



Murata 8430-2810 Size



Outling Drawing (Unit:mm) Tolerance:±0.1mm

