




126056-F32311-G

Testing Probe

6GHz 50Ω 126056-SMA(F) Probe Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR

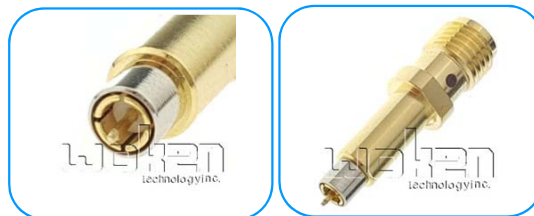

Electrical Specifications

Frequency	DC-6GHz
VSWR	DC-3GHz:1.3:1(Max.) 3-6GHz:1.6:1(Max.)
Insertion Loss	DC-3GHz:0.4dB(Max.) 3-6GHz:0.6dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	126056
Matching Connector	MM8430

Mechanical

Spring Force	35gf±15gf~155gf±15gf@0~1.5mm
--------------	------------------------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
126056 Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Spring	SWP	Nickel
Ring	Brass	Nickel
SMA Body	Brass	Gold

Test Report



Note.

1. 測試數據為實驗室測試值
2. 產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為主

Outling Drawing (Unit:mm)

