



126310-F26111-G

Testing Probe

6GHz 50Ω 126310/Gold- SMA(F)/Stainless 2Hole Flange Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.2:1(Max.)
Insertion Loss	DC-3GHz:0.5dB(Max.) 3-6GHz:0.8dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	126310

Mechanical


Durability	10K Cycles (Min.)
Spring Force	Signal Conductor:55gf±15gf~120gf±15gf@0~1.5mm Ground:100gf±15gf~150gf±15gf@0~1.5mm

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
126310 Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Spring	SWP	Nickel
Center Pin	Phosphor Bronze	Gold
SMA Body	Stainless Steel	

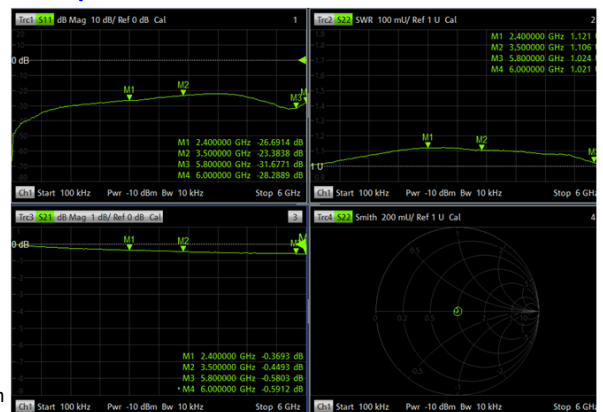

Note.

1. 測試數據為實驗室測試值
2. 產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為主

Outling Drawing (Unit:mm) Tolerance:±0.1mm

