



8030-M13041-7

Adapter

6GHz 50Ω 8030/Stainless- SMA(M)/Gold Adapter


Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

With 128310-F28111-G 6GHz 50Ω 126310/Gold-SMA(F)/Stainless 2Hole Flange Adapter

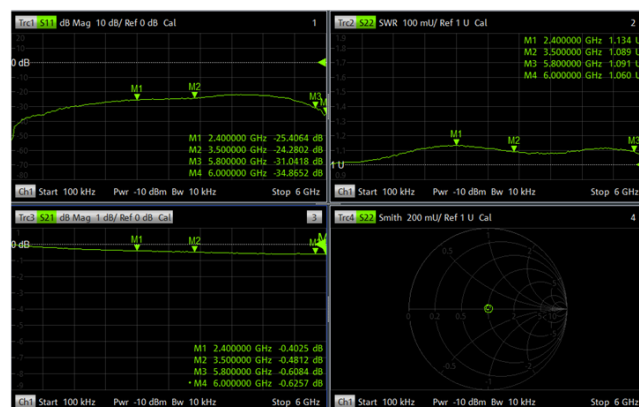

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.2dB(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	8030

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
SMA Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
Inner Retaining Ring	Stainless Steel	
Gasket	Silicone	Red
Shell	Brass	Gold
Body	Stainless Steel	

Outling Drawing (Unit:mm) Tolerance:±0.1mm

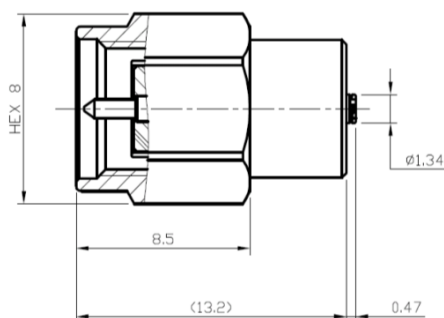

All Specification Changed Without Notification.