



8980-M11031-7

Adapter

6GHz 50Ω 8980/Stainless-- SMA(M)/Gold Adapter


Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

以下測試數據為合測試配件線材6GHz SMA(M)-SMPM(F)/R/A for 40cm Φ1.37mm Cable Assembly
及6GHz 50Ω 206618-SMPM(M) 2Hole Flange Probe Adapter之測試結果

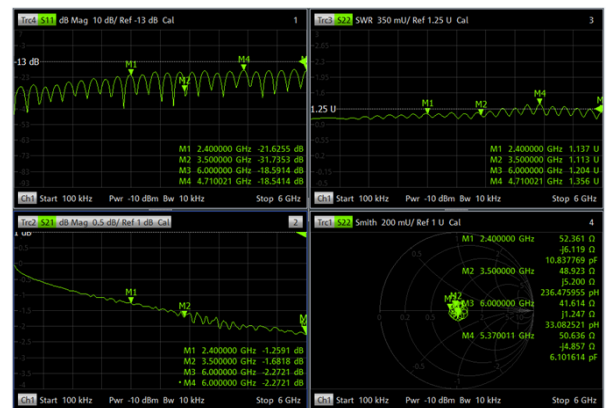

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	8980

Mechanical

Durability	500 Cycles (Min.)
------------	-------------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
SMA Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
Center Pin	Brass	Gold
8980 Body	Stainless Steel	
Inner Retaining Ring	Stainless Steel	
Gasket	Silicone	
Shell	Brass	Gold

Note.

1. 測試數據為實驗室測試值
2. 產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為主

Outling Drawing (Unit:mm) Tolerance:±0.1mm

