

Part No. WFIL-B1700-1920F

1700-1920MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Passband Frequency	1700-1920MHz
Description	Bandpass Filter
Insertion Loss	2.0dB max.
Return Loss	14dB min.
Rejection	DC-1660MHz:40dB min. 1960-3000MHz:40dB min.
Power Handling	5W
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

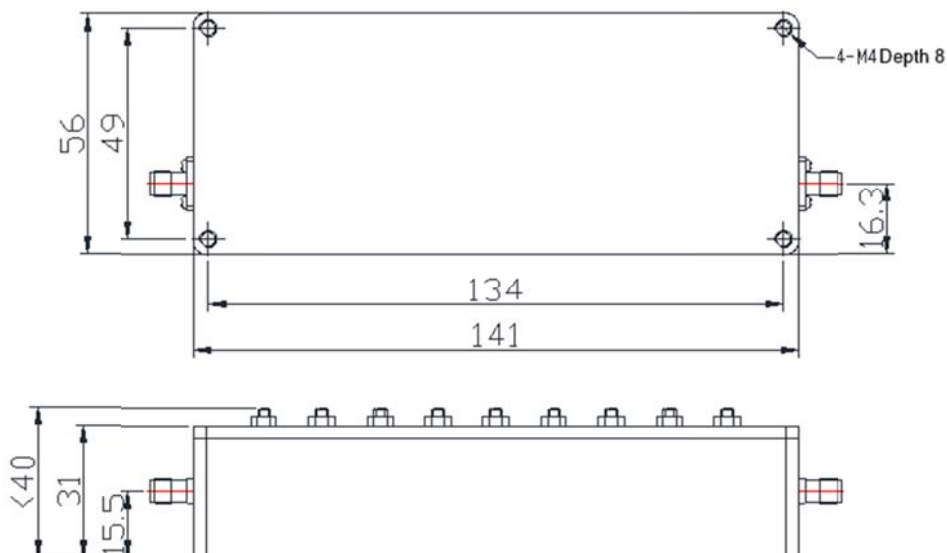

Test Report

