

Part No. WFIL-H8000-25000F

8-25GHz Highpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Pass Band Frequency	8-25GHz
Description	Highpass Filter
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Attenuation	DC-7280MHz: 50dB min 7280-7500MHz: 20dB min.
Impedance	50 Ohm
Connector Type	SMA
Power Handling	10W

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

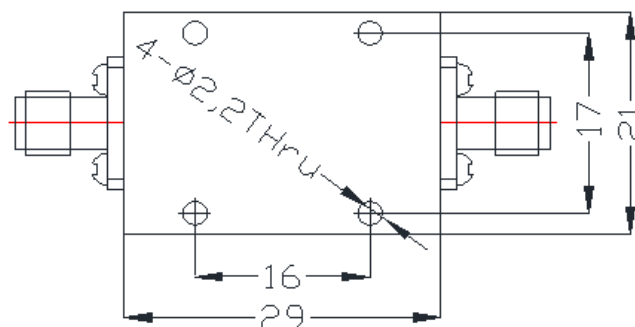

Test Report

