

Part No. WFIL-L7250F

DC-7250MHz Lowpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Pass Band Frequency	DC-7250MHz
Description	Lowpass Filter
Insertion Loss	1.0dB max.@DC-6GHz 1.5dB max.@6-7.25GHz
Return Loss	14dB min.
Rejection	8410-26500MHz :40dB min.
Impedance	50 Ohm
Power Handling	5W
Connector Type	SMA

Environmental Specification

Operating Temperature	5~+45°C
-----------------------	---------

Outline

Unit:mm

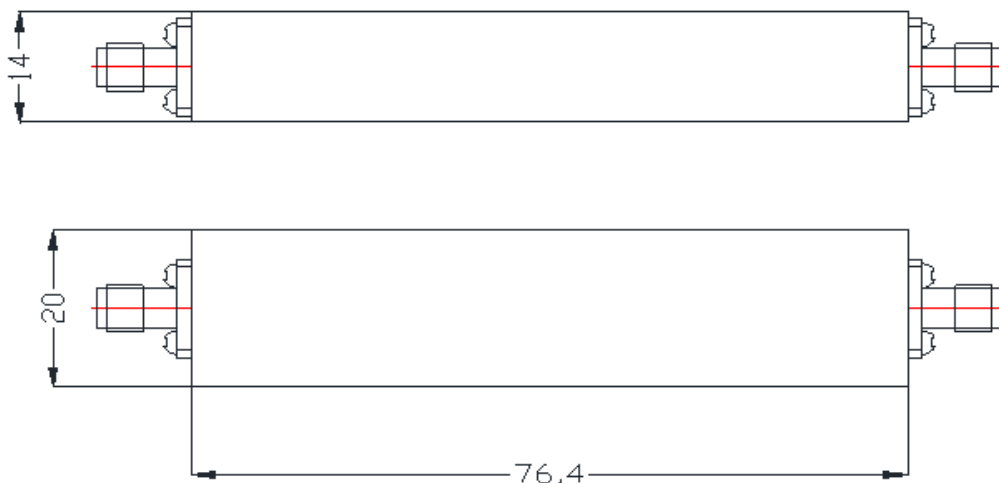

Test Report

