

Part No. WFIL-L900F

DC-900MHz Lowpass Filter/SMA

Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Passband Frequency	DC-900MHz
Description	Lowpass Filter
Insertion Loss	1.5dB max.
Return Loss	10dB min.
Rejection	1400-6000MHz : 60dB min. 6000-12000MHz : 30dB min.
Impedance	50 Ohm
Power Handling	10W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

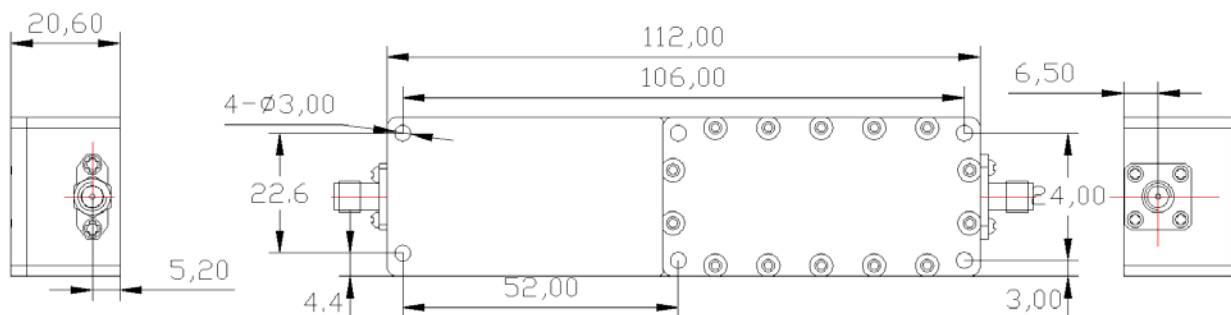

Test Report

