

Part No. WFIL-N2110-2170F-01

2110-2170MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification

Description	Notch Filter
F0	2,140MHz
Notch Depth	60dB min.: 2,110-2,170MHz
Passband	DC-2,000MHz , 2,300-6,000MHz
Insertion Loss	1.4dB max.
Return Loss	10dB min.
Power Handling	20W max.
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification


Operating Temperature	0~+50℃
-----------------------	--------

Material Specification

Housing	Aluminum
SMA Connector	Type 303 Stainless Steel-Polished & Passivated
Center Contact	Brass Plated Gold

Outline

Unit:mm

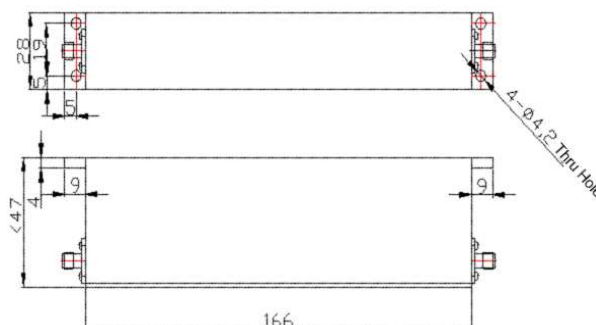

Test Report

