

**Part No. WFIL-N2410-2480F**

**2410-2480MHz Notch Filter/SMA**



**Features:**

- Low VSWR
- Low Insertion Loss
- High Performance



**Electrical Specification**


|                |                                             |
|----------------|---------------------------------------------|
| Description    | Notch Filter                                |
| F0             | 2445MHz                                     |
| Notch Depth    | 50dB min.: 2410-2480MHz                     |
| Passband       | DC-2390MHz , 2500-6000MHz                   |
| Insertion Loss | 1.0dB max.<br>2.0dB max. @ Passband Corners |
| Return Loss    | 14dB min.                                   |
| Impedance      | 50 Ohm                                      |
| Power Handling | 20W                                         |
| Connector Type | SMA                                         |

**Environmental Specification**

|                       |         |
|-----------------------|---------|
| Operating Temperature | 0~+55°C |
|-----------------------|---------|

**Outline**

**Unit:mm**

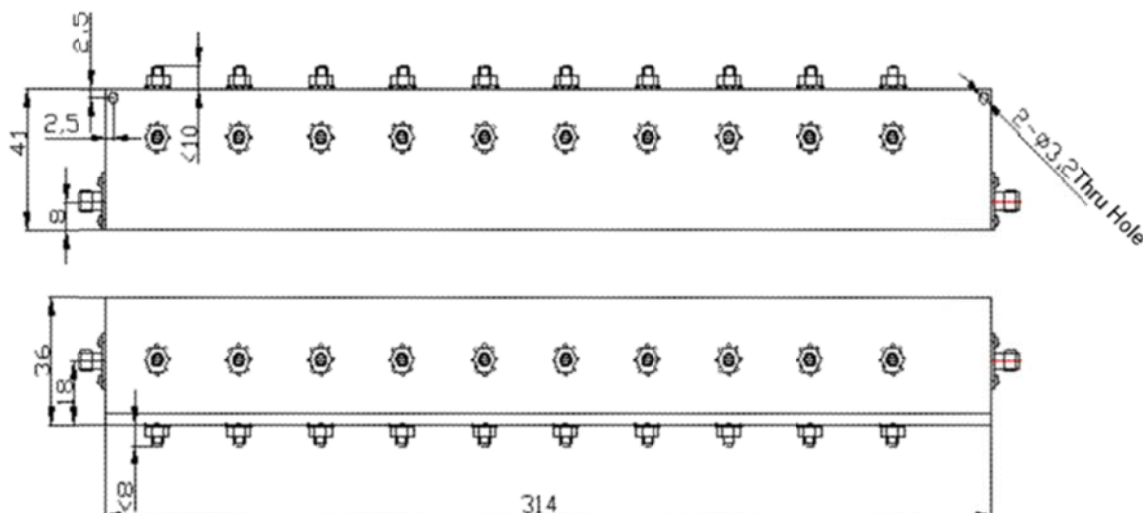

## Test Report

