

Part No. WFIL-N2500-2570F-01

2500-2570MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	2,535MHz
Notch Depth	40dB min.: 2,500-2,570MHz
Passband	DC-2,475MHz , 2,595-4,500MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Power Handling	50W max.
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

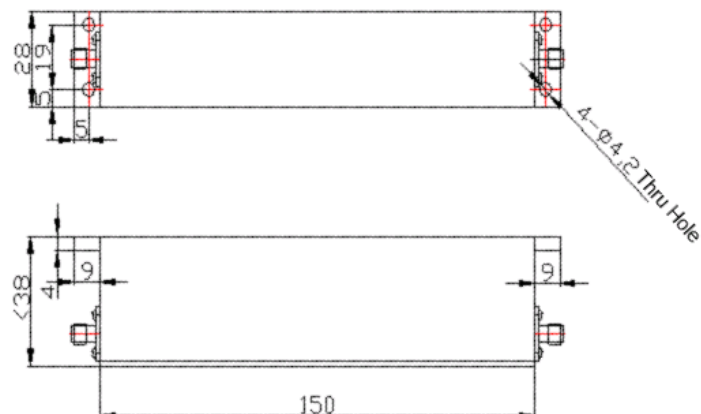

Test Report

