



沃肯科技有限公司



Web:Taiwan: www.woken.com.tw

China:www.wokentech.com

E-Mail:service_woken@woken.com.tw

Bandpass Filter Specification

Features:

- a) Low VSWR
- b) Low Insertion Loss
- c) High Performance



Specifications

Electrical	
Part No.	EWT-21-1296
Description	Bandpass Filter
Passband	1,805~1,880MHz
Passband Insertion loss	2.0dB(Max.)
VSWR	1.5:1(Max.)
Rejection	50dB(Min.)@F0+/-140 MHz
Power Handling	5W CW (Max.)
Termination	50Ohm
Connector	SMA Female
Mechanical	
Approx. Size	4.8" x1.35" x 0.9"
Enviromental	
Temperature Range	-10℃ to +60℃

** All Specification Changed Without Notification. **



沃肯科技有限公司




Web: Taiwan: www.woken.com.tw

China: www.wokentech.com

E-Mail: service_woken@woken.com.tw

Test Report

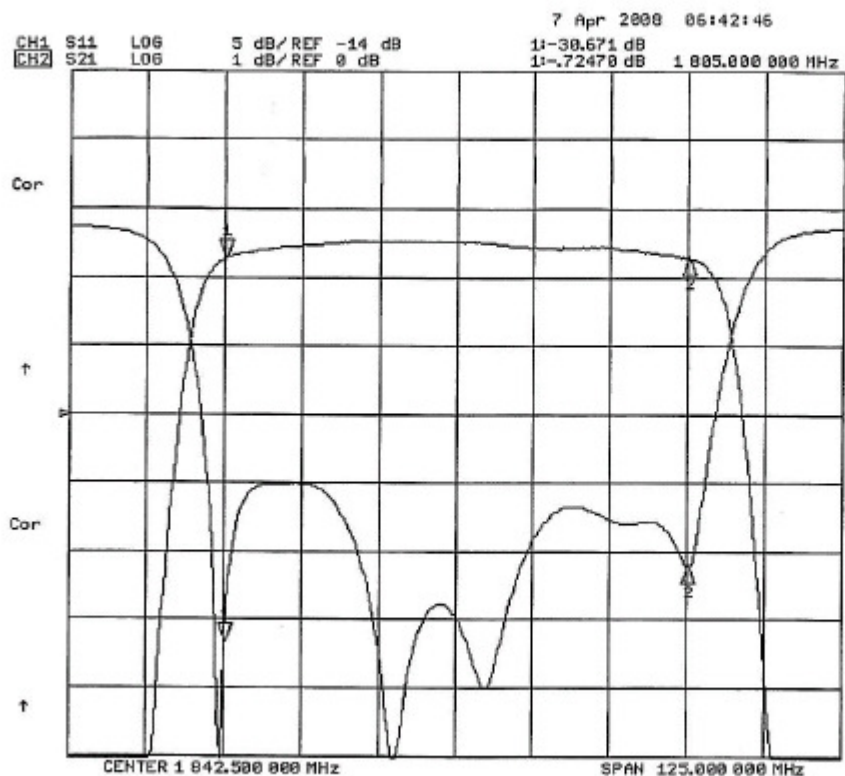


CH1 Markers
21-25.154 dB
1.80000 GHz

CH2 Markers
21-71040 dB
1.80000 GHz



Q.C.

Cust. Part Number: N/A
Technician: L.P.
Date: April 7, 2008

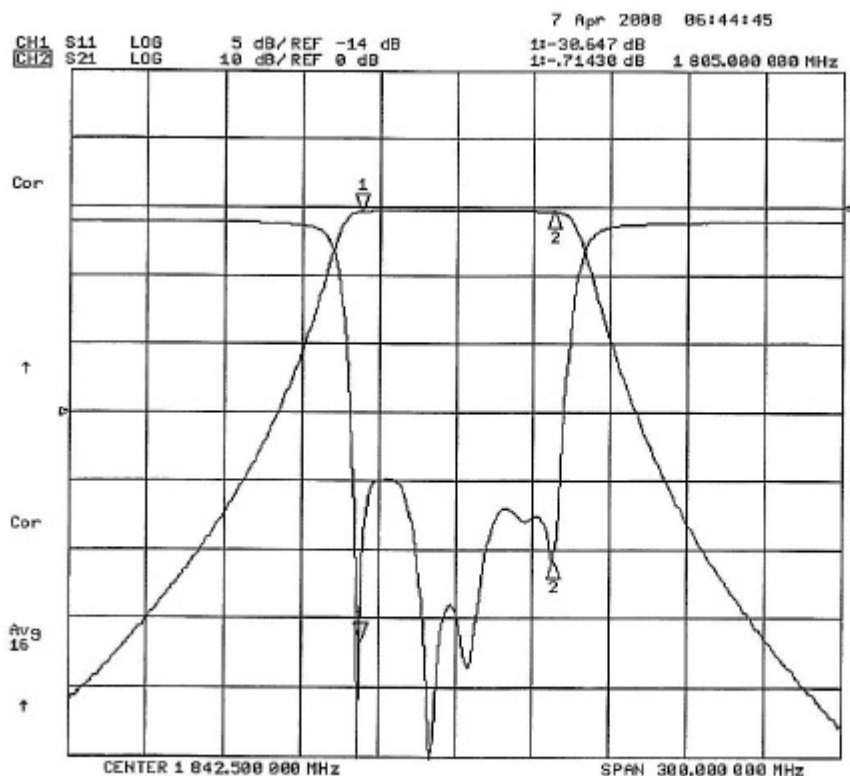

CH1 Markers
21-24.832 dB
1.80000 GHz

CH2 Markers
21-72000 dB
1.80000 GHz

EWT Part Number: EWT-21-1296
Serial Number: J1
S.O. Number: 21491



Form: 999-00016 Rev. 1