

Part No. WFIL-H3300-18000F

3.3-18GHz Highpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification

Passband Frequency	3.3-18GHz
Description	Highpass Filter
Insertion Loss	1.5dB max.
Return Loss	10dB min.
Rejection	DC-2500MHz: 45dB min
Power Handling	10W
Impedance	50 Ohm
Connector Type	SMA

Outline

Unit:mm

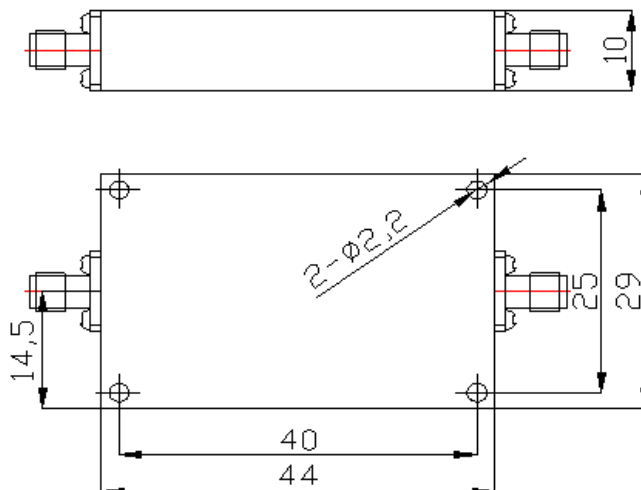

Test Report

