



沃肯科技有限公司



Web:Taiwan: www.woken.com.tw

China:www.wokentech.com

E-Mail:service_woken@woken.com.tw

Highpass Filter Specification

Features:

- a) Low VSWR
- b) Low Insertion Loss
- c) High Performance



Specifications

Electrical	
Part No.	EWT-57-0028
Description	Highpass Filter
Passband	35~1,000 MHz
Passband Insertion Loss	2.0dB (Max.)
VSWR	2.0 :1
Rejection	40dB(Min.) @ 27.7 MHz 60dB(Min.) @ DC~24.7MHz
Power Handling	5W CW (Max.)
Termination	50 Ohm
Connector	SMA Female
Enviromental	
Temperature Range	-10 °C ~ +60°C

**** All Specification Changed Without Notification. ****



沃肯科技有限公司




Web: Taiwan: www.woken.com.tw

China: www.wokentech.com


E-Mail: service_woken@woken.com.tw

Test Report

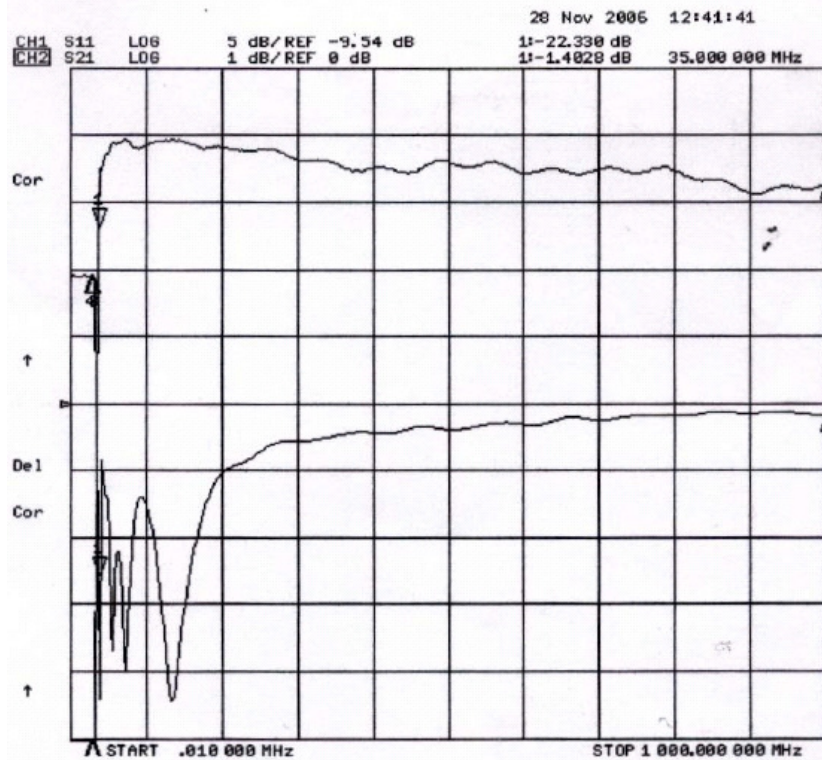


CH1 Markers
2--10.475 dB
1.00000 0Hz
3--0.89070 dB
27.7000 MHz
4--0.84170 dB
24.7000 MHz

CH2 Markers
2--7.2180 dB
1.00000 0Hz
3--56.420 dB
27.7000 MHz
4--75.156 dB
24.7000 MHz



Q.C.

Cust. Part Number: N/A
Technician: D. J. J.
Date: November 28, 2006

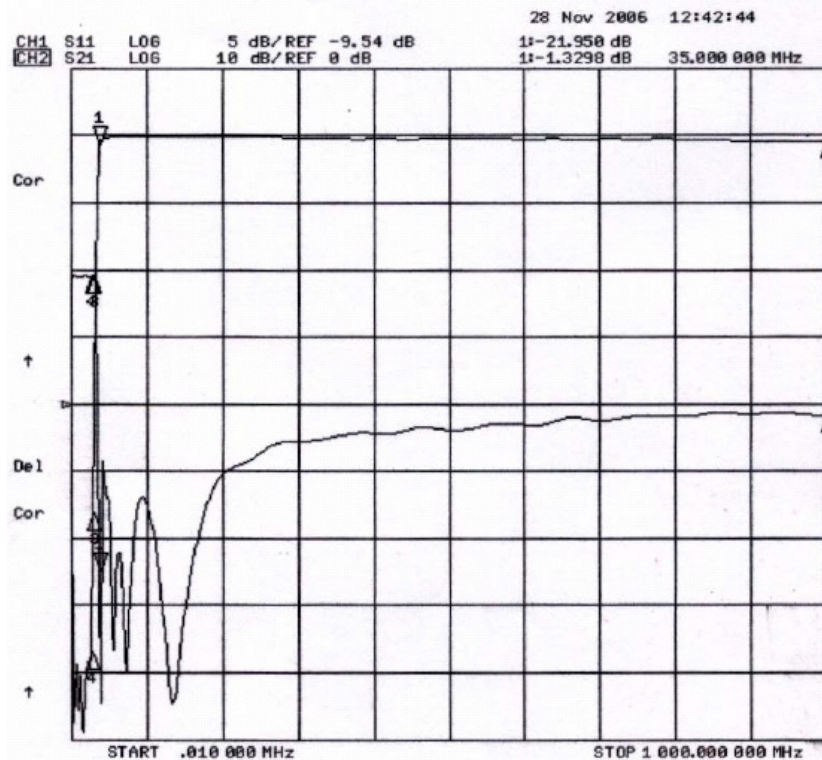

CH1 Markers
2--10.465 dB
1.00000 0Hz
3--0.89150 dB
27.7000 MHz
4--0.84140 dB
24.7000 MHz

CH2 Markers
2--7.2400 dB
1.00000 0Hz
3--56.430 dB
27.7000 MHz
4--77.143 dB
24.7000 MHz

EWT Part Number: EWT-57-0028
Serial Number: G1
S.O. Number: 21031



Rev. 1